


1 Items not included in this box that you will need:

- DC power cabling
- 19" equipment rack
- PSTN cables (RJ48)


2 In the box, you will find:

- One TMG800
- One set of mounting brackets with screws
- One DB9 to RJ45 adapter
- Three RJ45 Ethernet straight cables (male-male)
- One warranty sheet
- One packing slip
- One TMG800 Quick Installation Guide


3 Install rack-mounting hardware on TMG800 and install on equipment rack

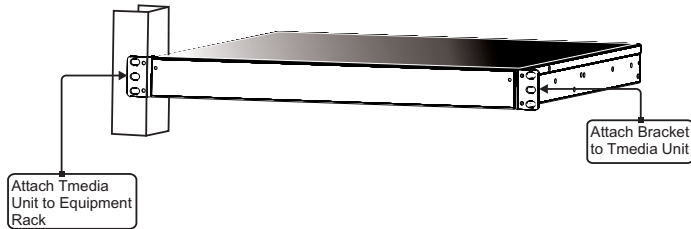


4 A) Connect to Tmedia Control Network. B) Connect to VoIP network.

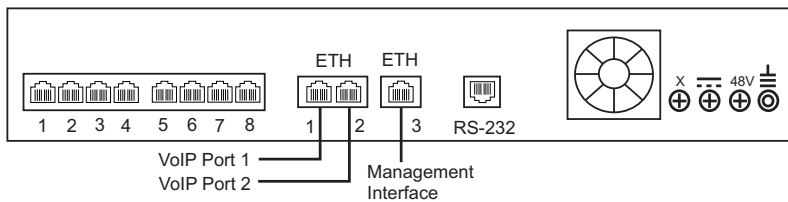


5 Connect to PSTN Network, using ports 1 to 8

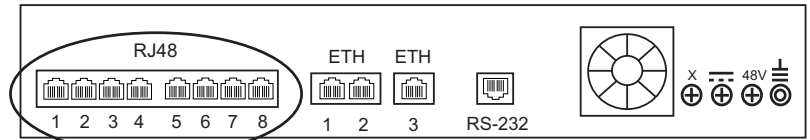


6 A) Connect to power source

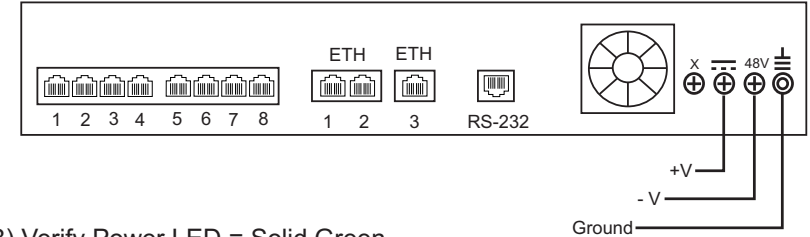

B) Verify Power LED = Solid Green

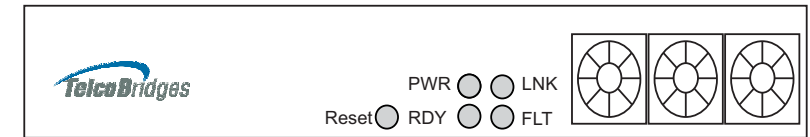

7 Connect the serial port to your server. (Use the DB9 to RJ45 Adapter.)

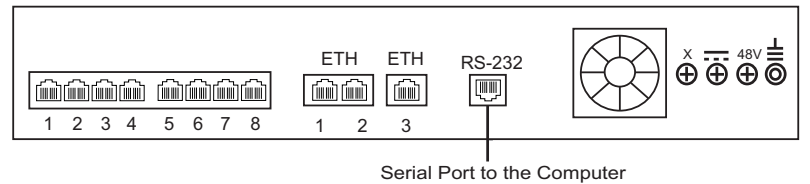

8 A. Connect to the Linux host through management Ethernet OR serial connector. The IP address of the management port is assigned through DHCP. If DHCP is not available, use the serial cable to connect to the TMG Linux Host for the first time.
 B. Default HOSTNAME is the Linux Host serial number, which can be found in the packing slip.
 C. Refer to the "Read Me" sheet for the username and password to log onto the Linux OS. Navigate to: HTTP://HOSTNAME:12358, to configure the Tmedia unit. (username/password: root/root)

Next Steps? More information is available on the TelcoBridges TB Wiki at: <http://docs.telcobridges.com/mediawiki/index.php/TMG800>