


- 1** Items not included in this box that you will need:
- One AC power cord
 - 19" equipment rack
 - PSTN cables (RJ 48/coax/fiber)



- 2** In the box, you will find:
- One TMP6401
 - One set of mounting brackets with screws
 - One DB-9 to RJ-45 adapter
 - SCSI Cables and Patch Panels, if applicable
 - Three CAT5 Ethernet Cables (male-male)
 - One warranty sheet
 - One packing slip
 - One TMP6401 Quick Installation Guide




- 5** Connect to PSTN Network, using one of the following options:
- RJ-48 Interface (T1/E1/J1)
 - SCSI Interface (T1/E1/J1), provided with patch panel
 - Dual BNC (DS3)
 - Optical Interface (OC3/STM-1)

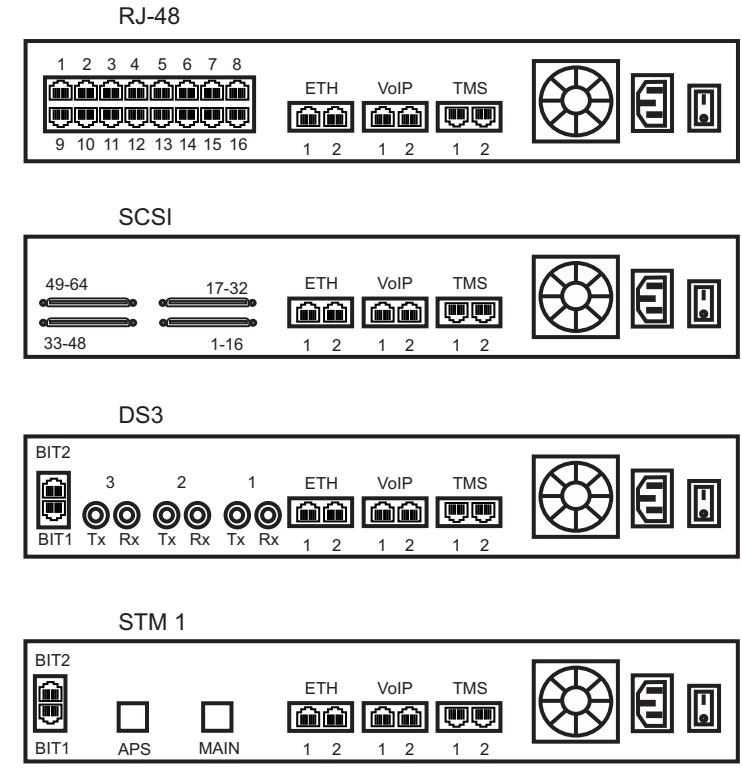

3 Install rack-mounting hardware on TMP6401 and install on equipment rack

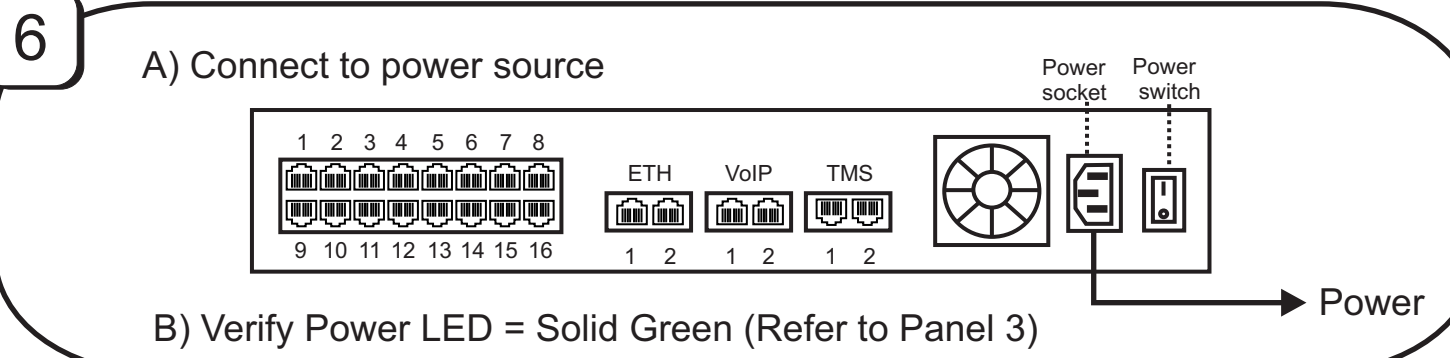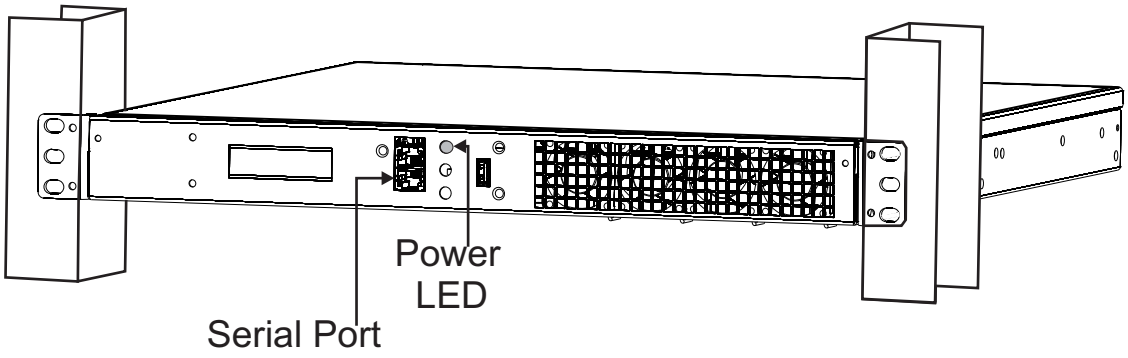

4 A) Connect to Tmedia Control Network. B) Connect to VoIP network.

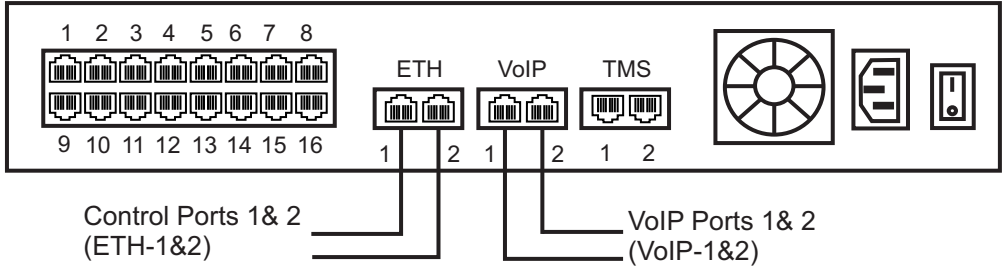

7 Connect the TMP6401 serial port to your server. (Refer to panel 3) (Use the DB9 to RJ-45 Adapter.)

8 Using a serial terminal, configure the IP address and gateway. Enter the following command:

- Type `set_boot`

9 Next Steps?

Refer to the Toolpack documentation set for information on configuring and administering your TMP6401.