



PRODUCT DESCRIPTION

The TelcoBridges **Tmedia TMG3200** is our mid-level VoIP gateway.


Recognised for its high-capacity and high-performance, the TMG3200-RJ is an 8 to 16 T1/E1 VoIP gateway that offers high-density in a single box (2U) solution.

Characteristics of the TMG3200-RJ:


- ✓ 2U VoIP gateway
- ✓ 256 to 512 VoIP channels
- ✓ 8 to 16 T1/E1s
- ✓ Software upgradeable by single T1/E1 and 32 VoIP channel increment
- ✓ Single or redundant AC or DC power supplies

For more information on the Tmedia TMG3200-RJ visit
www.telcobridges.com.

ILLUSTRATIONS

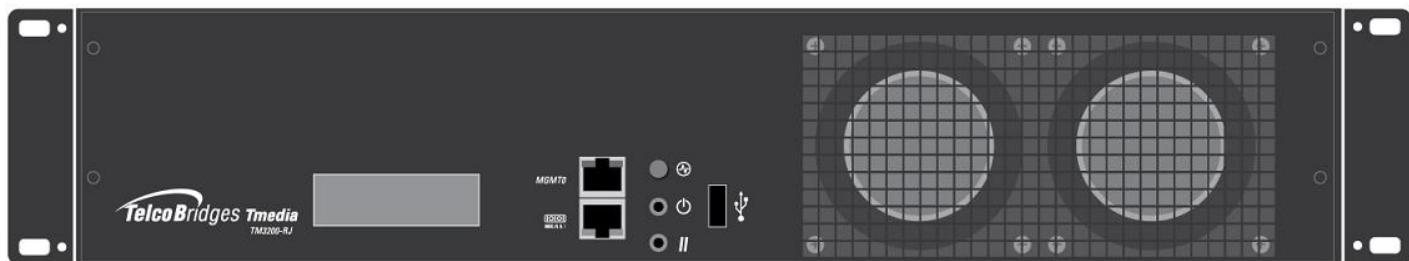

Tmedia TMG3200-RJ, 2U VoIP / media gateway **front view**

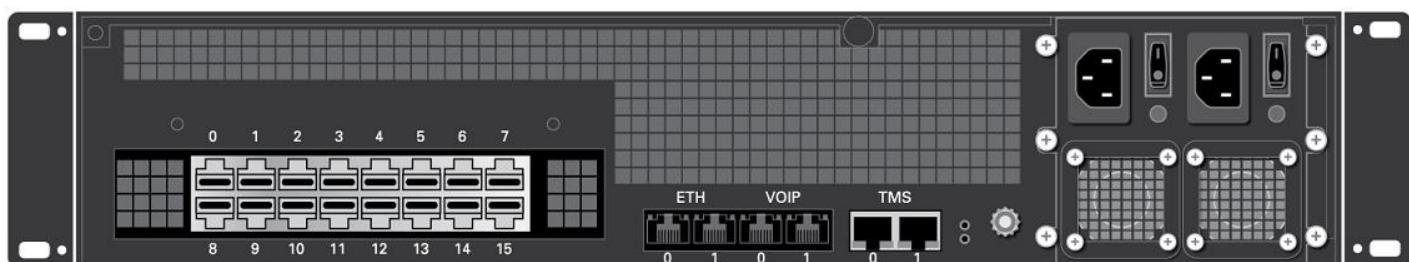

Tmedia TMG3200-RJ, **rear view AC (DC also available)**

Ordering information

Part #	Description
TMG3200-RJ-8	8 x T1/E1
TMG3200-RJ-9	9 x T1/E1
TMG3200-RJ-10	10 x T1/E1
TMG3200-RJ-11	11 x T1/E1
TMG3200-RJ-12	12 x T1/E1
TMG3200-RJ-13	13 x T1/E1
TMG3200-RJ-14	14 x T1/E1
TMG3200-RJ-15	15 x T1/E1
TMG3200-RJ-16	16 x T1/E1

Each configuration is available in redundant AC or DC power.

TelcoBridges Inc.
 91 de la Barre, suite 01
 Boucherville, QC
 J4B 2X6, CANADA

Sales +1.450.655.8993
TB Support +1.866.438.4703

www.telcobridges.com

Tmedia TMG3200-RJ VoIP / media gateway data sheet

Capacity and voice processing

256 to 512 VoIP channels (software upgrade)

PSTN interfaces

8 to 16 T1/E1 (software upgrade)

Independently configurable per port

RJ48C connectors on rear of unit

VoIP interfaces

Dual 100/1000Base-T

RJ45 connectors on rear of unit

Vocoding

Universal codecs: G.711, G.723.1, G.726, G.729ab, T.38 V.17, clear mode (RFC 4040)

Other codecs: G.722.2 (AMR-WB), G.728, G.729eg, iLBC, AMR, EVRC, GSM FR/EFR

Fax/Modem/Data

T.38 fax relay (V.17 and V.34)

Automatic G.711 fallback

Modem and data pass-through

DTMF relay

RFC 2833, SIP INFO Method, In-band

Echo cancellation

G.168 echo cancellation

128 ms echo tail on all channels simultaneously

Voice processing

Dynamic and programmable jitter buffer (20 to 200 ms)

Voice activity detection (VAD)

Comfort noise generation (CNG)

Management interfaces

1 RJ45 serial port with RS-232C adapter

Dual 100/1000Base-T for OAMP

Supports virtual IP

Signalling (Simultaneous signalling support)

SIP

Supported RFCs: 2327, 2976*, 3261, 3262, 3263, 3264*, 3311*, 3323*, 3325*, 3398, 3515, 3578*, 3764, 3891, 4028, 3581, 3665*, 3666 (*: partial compliance)

SIGTRAN

M2PA, M2UA, M3UA, IUA

SS7 termination and/or relay supported

SS7

Up to 64 x MTP2 links (56, 64, n x 56/64 kbps, HSL)

Multiple redundant MTP2 links

Up to 64 MTP3 originating point codes and linksets

ISUP variants: ITU 92, ITU 97, ANSI 88, ANSI 92, ANSI 95, Q.767, Telcordia 97, ETSIv2, ETSIv3, China, Singapore, UK

ISDN PRI

Q.931 ISDN PRI: NI-2, 4ESS, 5ESS, DMS-100, DMS-250, Euro ISDN

ETSI NET5 (France, Germany, UK, China, Hong Kong, Korea), NTT (Japan), Australia

CAS

MFC R2 (standard ITU, Brazil, Mexico)

Customizable protocol script files

TelcoBridges Inc.

91 de la Barre, suite 01, Boucherville, QC, J4B 2X6, CANADA

TB Support +1-866-438-4703, Sales +1-450-655-8993

TMG-CONTROL

Standalone call control

Any to any call routing (TDM-VoIP, TDM-TDM, VoIP-VoIP with transcoding)

Call routing based on: trunk group, calling/called numbers, nature of address, ASR, time of day, load-based, cost-based, TO:, FROM:

Request URI, redirect numbers, and other parameters

NPA-NXX routing (100K+ table entries, Excel or CVS file upload)

Route retries, calling/called digit manipulation, customizable call cause code mapping, call transfer (REFER, AT&T TR 50075)

H.248 (MEGACO) call control

ITU-T H.248 versions 1 and 2

UDP, SCTP, IPSec transport

DTMF and fax detection

DTMF, call progress tone generation, COT generation

Call quality and inactivity alerts

H.248 control port redundancy (supports virtual IP)

Session management and billing

SIP peer availability polling

RTP inactivity monitoring, RTCP

CDR generation (RADIUS and text file)

OAMP+T

Operation & Administration

Web-based system status and operations

SNMP V2, V3 GET, TRAPs and alarms

Maintenance

Web-based interface for maintenance

Automated system upgrade

System backup, restore and copy

Provisioning

Web-based interface for configuration

Dynamic activation

Dynamic configuration changes

Troubleshooting

Per-call tracing (history and/or live)

Signalling capture tools

SSH command-line interface

Electrical characteristics

Power input

90 to 260 VAC, 47 to 63 Hz, -40 to -60 VDC

Redundant power supply option with dual power inputs

Maximum 138W power consumption

Physical characteristics (Dimensions & Weight)

2U, 3.5"(88.9mm) H x 17.4" (442mm) W x 16" (406mm) D

20lbs (9.1kg)

Regulatory compliance (UL/CSA 60950, CSA C22.2)

EMC : FCC Part 15:2009, Subpart B, CE Mark (EN55022:2006, Class A, EM60950, EN61000, ETS 300 386)

Environmental

Operating temperature: 0 to +55 °C, 95% re. hum. non-condensing

Storage temperature: -10 to +75 °C, 95% rel. hum. non-condensing

Designed to meet NEBS Level 3, RoHS compliant

