

TSG3200 SS7/Signaling Gateway – T1/E1 or DS3 or OC3/STM-1



The TelcoBridges **Tsig TSG3200** is a high-density carrier-grade SS7/SIGTRAN gateway and converter.

Supporting multiple TDM interface types, the TSG3200 is the most cost-effective SS7/Signaling gateway solution for service providers that is currently available on the market.

Product Characteristics:

- ✓ 1U SS7/SIGTRAN gateway
- ✓ TDM interface (ordering option)
 - 16 to 64 T1/E1 or
 - 1 to 3 DS3 or
 - 1 OC3/STM-1 with APS
- ✓ SIGTRAN, SS7
- ✓ SCCP routing with Global Title Translation (GTT)
- ✓ Supports conversion from ISDN and CAS protocols
- ✓ Software upgradeable by T1/E1 increments
- ✓ Hot-swap redundant power supply (AC or DC)
- ✓ Tsig 1+1 solution option

Tsig 1+1 Protection Characteristics:

- ✓ Supports all TDM interface types: T1/E1, DS3 or OC3/STM-1
- ✓ Passive solution (no power required)
- ✓ Enables full facility protection (TDM and IP)
- ✓ Active/Standby architecture with two TSG3200 units
- ✓ No single point of failure
- ✓ Five nine's redundancy

Tsig™ **TSG3200** Data Sheet

TelcoBridges Inc.
91 de la Barre, suite 01
Boucherville, QC
J4B 2X6, CANADA

Sales +1.450.655.8993
TB Support +1.866.438.4703

info@telcobridges.com
www.telcobridges.com

Interfaces

PSTN interfaces

16 to 64 T1/E1 or
1 to 3 DS3 or
1 OC3/STM-1 with APS
Framing independently configurable per port
2 BITS interfaces on DS3/OC3/STM-1 units

Packet interfaces

Up to 4 Ethernet ports 100/1000Base-T
RJ45 connectors on rear of unit
Up to 16 different IP addresses
Ethernet port bonding and 802.1q VLAN support

High Availability & Redundancy

Power supply redundancy
IP port redundancy
Self-recovery software
Fault tolerant software
MTP2/SS7 links redundancy

Tsig 1+1 solution (optional)

The *Tsig* 1+1 solution extends the high-availability and redundancy features of the TSG3200

SS7/SIGTRAN gateway redundancy (active/standby)
Full capacity protection (TDM and IP)
Configuration database redundancy
Seamless software upgrade
M3UA/MTP3/ISUP redundancy

Tsig 1+1 solution consists of:

- 1 active unit and 1 standby unit
- Up to 2 units 1+1 Patch Panel(s)

1+1 Patch Panels are passive (no power required)

Signaling

Simultaneously supports any combination or all of the following signaling protocols:

SS7

Up to 64 MTP2 links (56, 64, n x 56/64 kbps) or
2 x HSL
Multiple redundant MTP2 links
Up to 64 originating point codes and 256 linksets
Up to 256 destination point codes
ISUP variants: ITU 92, ITU 97, ANSI 88, ANSI 92,
ANSI 95, Q.767, Telcordia 97, ETSI v3, China,
Singapore, UK, SPIROU, Japan NTT, Russia
SCCP routing and global title translation (GTT) based
on called/calling party, SSN and Opcode

SIGTRAN

M2PA, M2UA, M3UA (IPSP, ASP, SG), IUA
SCTP (raw IP and UDP)
SS7 termination and/or relay supported
Up to 64 M2UA / M2PA links
Up to 64 M3UA peer server processes

ISDN PRI

Q.931 ISDN PRI (user and network side)
ISDN variants: NI-2, 4ESS, 5ESS, DMS-100,
DMS-250, Euro ISDN ETSI NET5 (France,
Germany, UK, China, Hong Kong, Korea), Euro
Numeris (VN6), NTT (Japan), Australia
ISDN NFAS with D-channel backup

CAS

MF R1 (including E&M, loop start, ground start)
MF R2 (including standard ITU, Brazil, Mexico,
Venezuela)
Customizable script files to implement any CAS variant

TMG-CONTROL (Call Control)

Toolpack framework call control

Call routing based on: trunk group, calling/called numbers (with digit manipulation) and/or various other protocol information/headers.

Customizable routing including priority-based, load-balancing, black listing, call limiting, route retries, etc.

Customizable call cause code mapping

Programmable call routing: Access and manipulation of call parameters (SIP, SS7 and ISDN), including Nature of Address (NOA)

RADIUS authentication and authorization (supports multiple RADIUS servers)

NPA-NXX routing (over 5 million records)

Session management and billing

CDR generation (RADIUS and/or csv files)

Integrated lawful intercept (ETSI ES 201 671 v.2.1.1)

OAMP+T

Operations & Administration

Provisioning, management and status GUI

CLI and configuration file machine-to-machine interface (RESTful)

Configuration change audit logging

Access, user and privilege management

SNMP V2, V3 GET, TRAPs (alarms)

Extensive SNMP call statistics MIBs

Management

2 Ethernet control ports 100/1000Base-T

1 USB Type B serial port

1 RJ45 RS232 serial port

GUI-based and CLI system upgrade

GUI-based configuration copy, backup and restore

Storage for multiple software versions

Storage for multiple configuration files

Extensive system status display

Provisioning

Non-service affecting configuration changes

Offline configuration validation

Multiple configuration files archive

Northbound API (RESTful) for automated provisioning

Network Analytics (TB Analytics)

Live call trace with protocol information and ladder diagrams

Live test call with media playback and recording

TB Sigtrace – Protocol signaling capture into pcap files

Media call recording (scriptable for calling and called numbers)

Maintenance

Replaceable fan filters

Dimensions & Weight

TSG3200

1U, 19" rackmount

1.75" (44.5 mm)H x 16.9" (429 mm)W x 16" (406 mm)D

14.5 lbs (6.6 kg)

TSG3200 1+1 patch panels

1U, 19" rackmount

1.75"(44.5 mm)H x 16.9"(429 mm)W x 5.25"(133 mm)D

3.4 lbs (1.6 kg)

Regulatory Compliance

Safety

CAN.CSA C22.2

EN 60950-1:2005

EN 60950-1:2006

EMC

FCC Part 15:2013, Subpart B,

CE Mark (EN55022:2010, Class A, EN61000, ETSI EN 300 386)

Electrical Characteristics

90 to 260 VAC, 47 to 63 Hz or -36 to -72 VDC
Hot-swap redundant power supply (AC or DC)
Maximum 138W power consumption

Environmental

Operating temperature:
0 to +70 °C, 95% rel. hum. non-condensing
Storage temperature:
-10 to +85 °C, 95% rel. hum. non-condensing
Designed to meet NEBS Level 3
RoHS compliant



Tsig TSG3200 (front view)




Tsig TSG3200-TE AC (rear view)



Tsig TSG3200-DS3 AC (rear view)



Tsig TSG3200-STM1 AC (rear view)

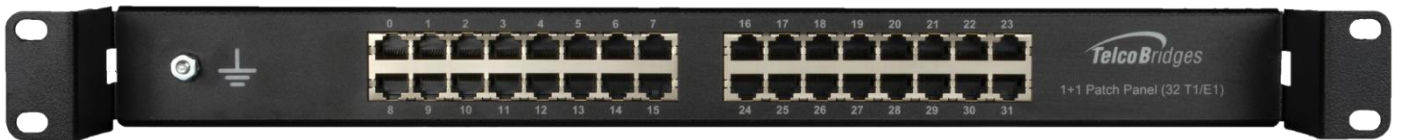

Tsig TSG3200-TE 1+1, Patch Panel (front view)



Tsig TSG3200-DS3 1+1, Patch Panel (front view)



Tsig TSG3200-STM1 1+1, Patch Panel (front view)

© 2016 TelcoBridges Inc. All rights reserved.
 The TelcoBridges logo is a registered trademark of TelcoBridges Inc.
 This document and any products or functionality it describes are
 subject to change without notice.
 Please contact TelcoBridges for additional information and updates.